


## BASE FLASHING FOR WALL-SUPPORTED DECK



**NOTES:**

1. THIS DETAIL SHOULD BE USED ONLY WHERE THE DECK IS SUPPORTED BY THE WALL.
2. THIS DETAIL IS SIMILAR TO DETAIL 'D'. THE JOINTS IN THE TWO PIECES OF FLASHING SHOULD NOT BE SOLDERED. BREAKS IN SOLDERED JOINTS COULD CHANNEL WATER BEHIND THE FLASHING. CLIPS AT THE BOTTOM OF THE FLASHING ARE NOT NECESSARY ON FLASHINGS OF 6" OR LESS.
3. SEE DETAIL 'D' FOR THE PREFERRED CONSTRUCTION.

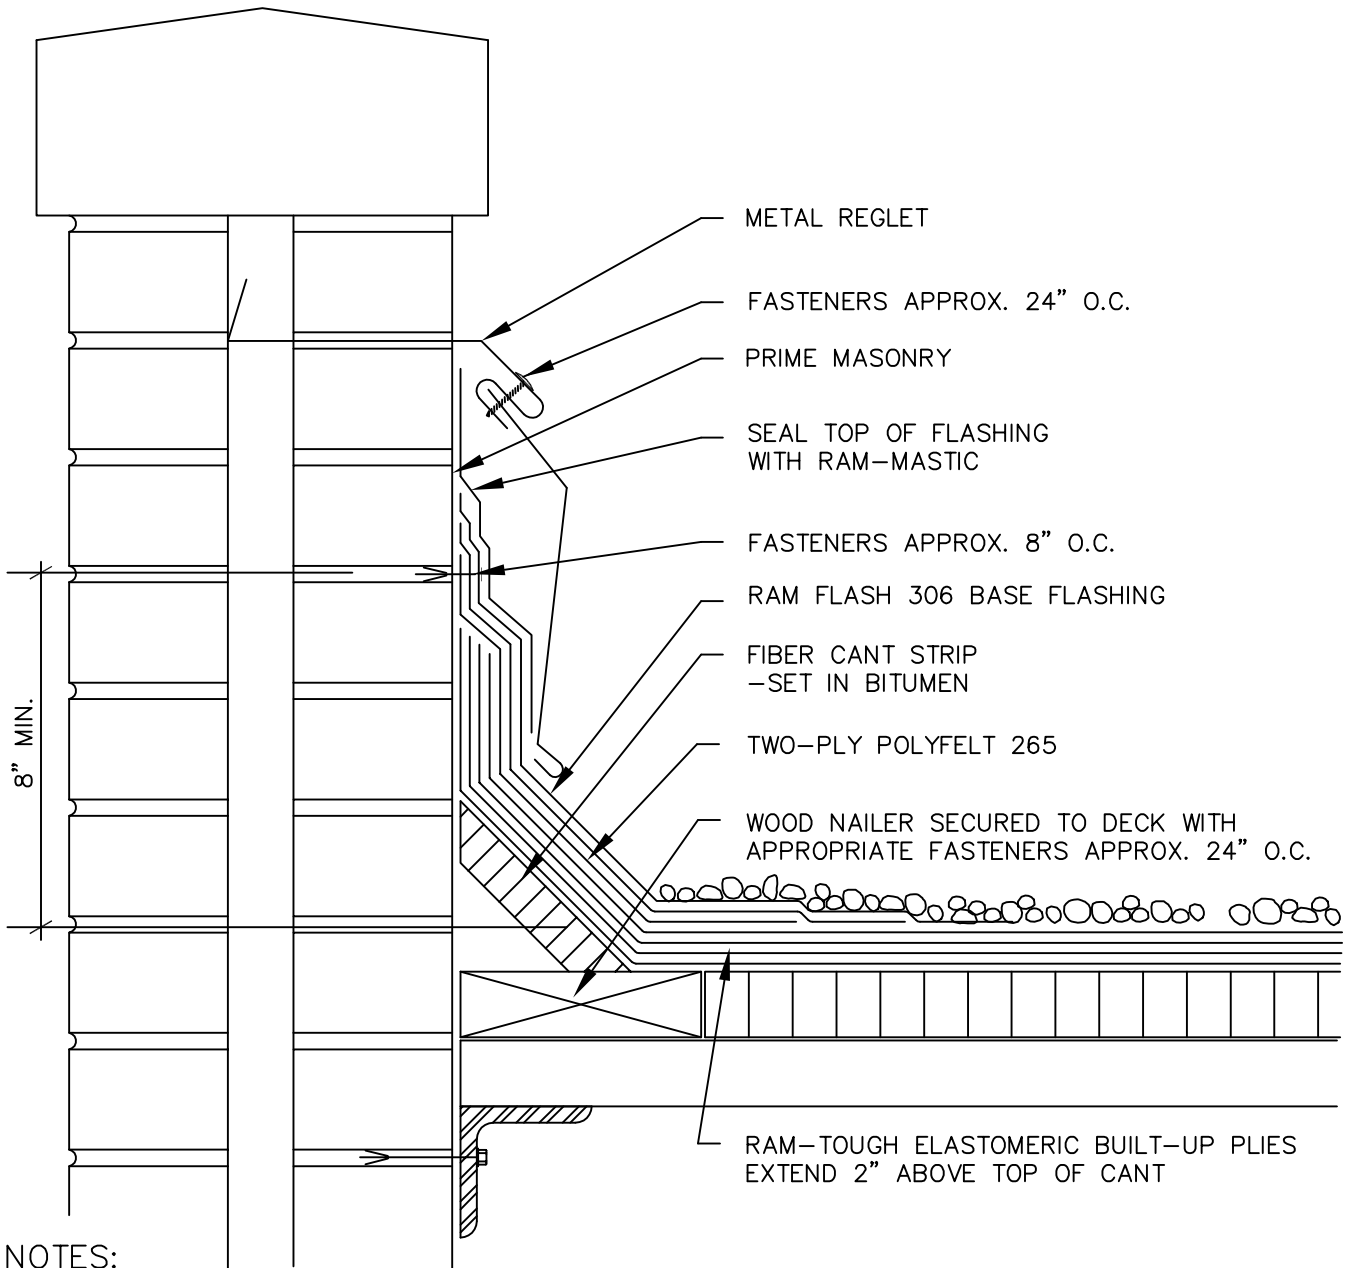

BARRETT COMPANY  
 BRT-ESEC.DWG  
 FOR TECHNICAL ASSISTANCE  
 CALL 1-800-647-0100