



RamTough 250 Waterproofing Systems

from The Barrett Company, LLC

WHY CHOOSE US

For over 10 decades, the Barrett Company has provided hands-on experience, professionally engineered products, & systems in the high-performance roofing & waterproofing applications.



Satisfaction



Loyal & service-oriented



Team support



Labor & material warranties available



RamTough 250 is a hot applied rubberized asphalt membrane which forms a completely monolithic, waterproof system without seams or joints.


RamTough 250 exhibits excellent adhesion to horizontal and vertical surfaces. **RamTough 250** forms a robust monolithic waterproof system that does not allow water to migrate under the membrane.

Through continuous customer satisfaction, the Barrett Company is proud to deliver a long history of successful performance.

Feature & Benefits

- Forms a monolithic, elastic, joint-free membrane with triple reinforced flashings
- Applied in cold weather (to 0°F) on frost-free surface
- 215 mils of protection
- 100% solids - no solvents, no mixing, no on-site cure failures, and no shrinking
- Tenacious adhesion eliminates water migration under the membrane

Plaza Deck Assembly

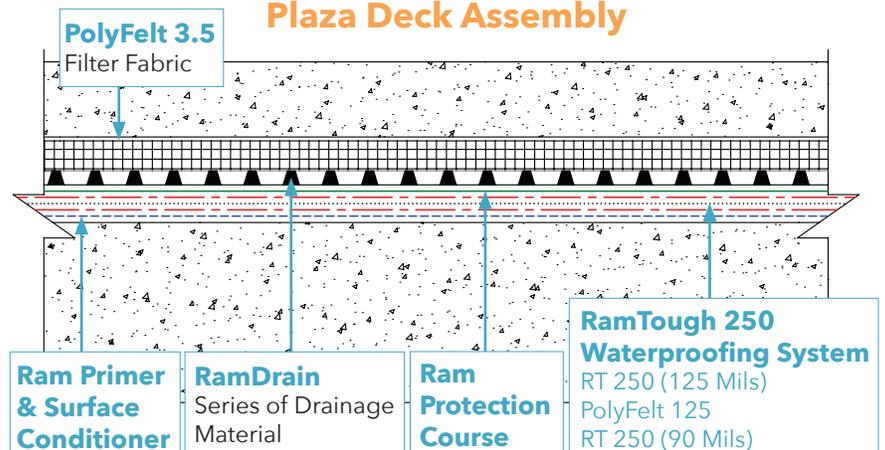

**BETWEEN THE WORLD
AND THE WEATHER SINCE 1928**

barrettroofs.com



Layers Barrett's **RamTough 250** includes:



Ram-Tough 250 - composed of SBS rubber polymers, specially refined unoxidized asphalts and a mineral filler. It is melted on the job site, spread on the deck and walls in 90 mil thickness, reinforced with **PolyFelt 125** (polyester fabric) and over-coated with 125 mil of **RamTough 250**, 215 mil total thickness. It instantly sets up to a custom-fit seamless, reinforced modified bitumen rubber sheet.

Complete your system with these other roofing products from Barrett: RamDrain Series, Ram Protection Course Series, Ram Root Barrier Series, and flashing materials.



Green Roof System

