


Approved Drainage Mat,
if required

Approved Ram Protection
Course

Ram Surface Conditioner
and Primer

Closed cell Backer Rod

327 HDR Ram Flashing set in
RamTough 250. Minimum 6"
on either side of joint

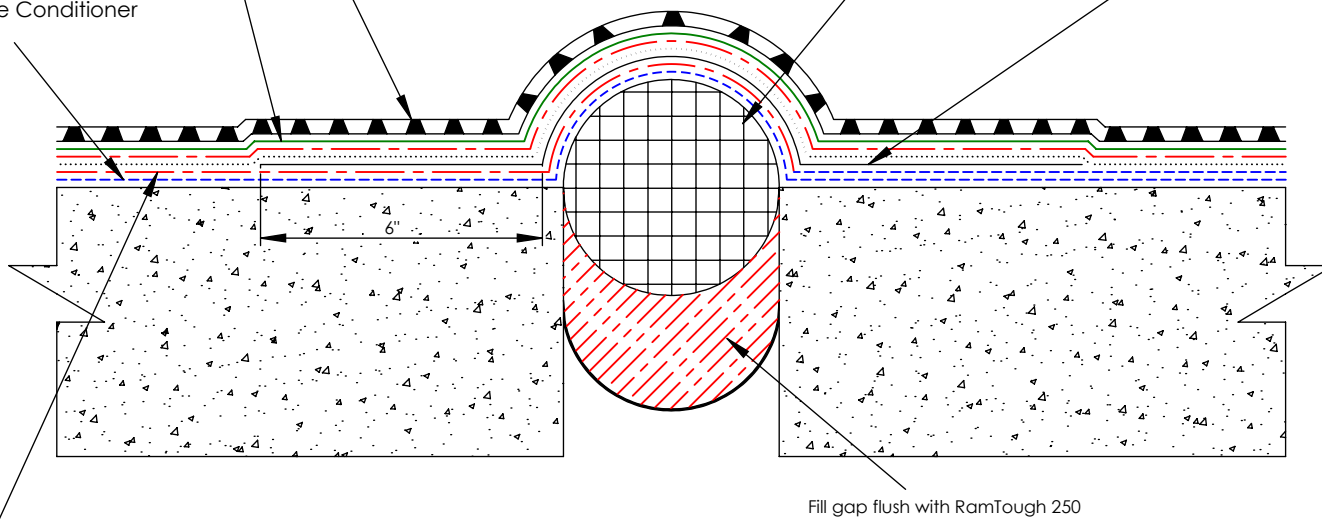

Fill gap flush with RamTough 250

RamTough 250 Waterproofing System:

- RT 250 (125 Mils)
- Poly Felt 125VP
- RT 250 (90 Mils)

Contact Info:

www.barrettroofs.com
P: 1-800-647-0100



Drawing Detail:

RT250 treatment floor to floor
expansion joint (uncured Neoprene)

* Drawing not to scale

File Name:

RT250 - Detailed - 12A

Drawing Number:

12

Date:

11/21/2019

Drawn By:

N.C.