


HyppoCoat 100

Warranty Requirements

Barrett
ROOFS

10-Year Material Only & Authorized Approved Applicator Only

HyppoCoat PC Primer Coat	HyppoCoat 100 Base Coat	Aggregate Surface Coat	HyppoCoat TC Top Coat
—	<p>PEDESTRIAN: 30 mils (50 sqft/gal)</p> <p>VEHICULAR: 45 mils (33 sqft/gal)</p> <p>HEAVY-DUTY VEHICULAR: 55 mils (27 sqft/gal)</p>	<p>ALUMINUM OXIDE: Premix with Deck Coating</p> <p>FLAKE, QUARTZ, & SILICA SAND: 16/30; 30/60 Broadcast (excess removed)</p>	<p>ALUMINUM OXIDE: N/A</p> <p>FLAKE, QUARTZ, & SILICA SAND: Single Coat (10 mils)</p>

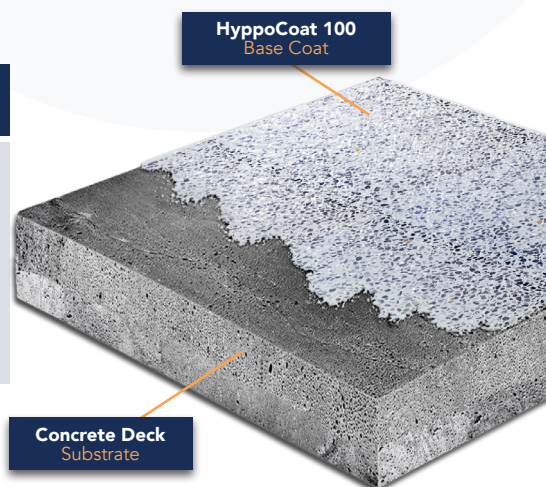


Additional Approved Products Over HyppoCoat 100:

- Barrett RamDrain approved drainage board and root barrier
- Wasua/Hanover Pavers & Pedestal components only
- Dow Chemical, Owens Corning, Kingspan, and Insulfoam XPS/EPS insulation (min. 60 PSI)
- TORGINOL® Quartz ColorGranules/Flake Chips
- Chips Unlimited Flake Chips

+ 10-Year Labor & Material Warranty

HyppoCoat PC Primer Coat	HyppoCoat 100 Base Coat	Aggregate Surface Coat	HyppoCoat TC Top Coat
<p>COVERAGE: 10 mils (152 sqft/gal)</p>	<p>PEDESTRIAN: 30 mils (50 sqft/gal)</p> <p>VEHICULAR: 45 mils (33 sqft/gal)</p> <p>HEAVY-DUTY VEHICULAR: 55 mils (27 sqft/gal)</p>	<p>ALUMINUM OXIDE: Premix with Deck Coating</p> <p>FLAKE, QUARTZ, & SILICA SAND: 16/30; 30/60 Broadcast (excess removed)</p>	<p>ALUMINUM OXIDE: N/A</p> <p>FLAKE, QUARTZ, & SILICA SAND: Single Coat (10 mils)</p>

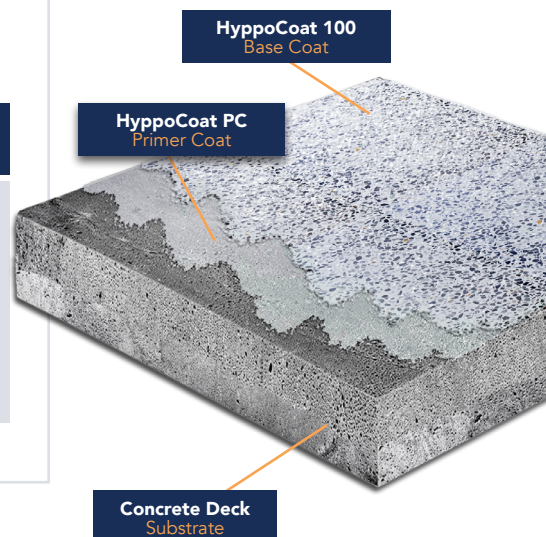

DOCUMENT: KF-04005 - 1



(800) 647-0100



info@barrettroofs.com

barrettroofs.com


HyppoCoat 100

Warranty Requirements

Barrett
ROOFS

20-Year Material Only & Authorized Approved Applicator Only

HyppoCoat PC Primer Coat	HyppoCoat 100 Base Coat	Aggregate Surface Coat	HyppoCoat TC Top Coat
COVERAGE: 10 mils (152 sqft/gal)	PEDESTRIAN: 30 mils (50 sqft/gal) VEHICULAR: 45 mils (33 sqft/gal) HEAVY-DUTY VEHICULAR: 55 mils (27 sqft/gal)	ALUMINUM OXIDE: Premix with Deck Coating FLAKE, QUARTZ, & SILICA SAND: 16/30; 30/60 Broadcast (excess removed)	ALUMINUM OXIDE: N/A FLAKE, QUARTZ, & SILICA SAND: Single Coat (10 mils)

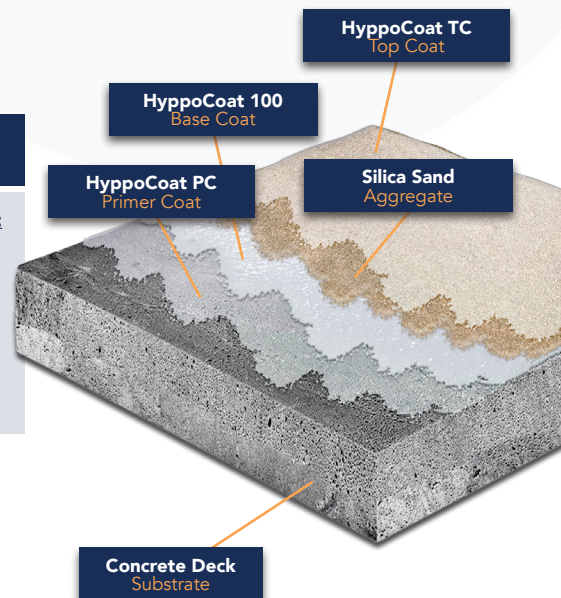

Additional Approved Products Over HyppoCoat 100:

- Barrett RamDrain approved drainage board and root barrier
- Wasua/Hanover Pavers & Pedestal components only
- Dow Chemical, Owens Corning, Kingspan, and Insulfoam XPS/EPS insulation (min. 60 PSI)
- TORGINOL® Quartz ColorGranules/Flake Chips
- Chips Unlimited Flake Chips

TERMS & CONDITIONS

- Inspect coating every 5 years.
- Recoat required on the 10th year. (Minimum 20 mils of HyppoCoat 100)
- 20-Year Material Only/Authorized Approved Applicator Only
- Contact a Barrett Technical Sales Representative prior to application for approved system of products based on substrate & job conditions

**Roof, Plaza, Parking, and Balcony Decks that call for waterproofing over a condition space will REQUIRE a 48-hour/2" Flood Test or ILD/EFVM system.

DOCUMENT: KF-04005 - 1



(800) 647-0100



info@barrettroofs.com

barrettroofs.com